

700MDVPIR-AU

Outdoor IR Dome



PRODUCT SPECIFICATIONS


PRODUCT FEATURES

- 1/3" Sony EXView 960H CCD
- 700TVL, Min Illumination 0 Lux
- 3.6mm Board Lens
- 24Pcs IR LED, IR Distance 6m (19ft) Smart IR Control
- Integrated Mic for Audio support
- DC12V, lower power consumption, 200 mA Max
- Vandal Proof design. IP66 rated



PRODUCT CAPABILITIES

The 700MDVPIR-AU, the newest exclusive member of the SkyView Series, is a professional armored security Dome with infrared LED illumination which captures high contrast, high resolution motion video, using a top of the line 1/3 inch CCD sensor and a 3.6 mm lens. The image signal processor allows to set up a wide assortment of options, reduce the video noise with a 2D technology (DNR). The camera can be aimed in any direction thanks to the eyeball style adjustable 3-axis freedom design.

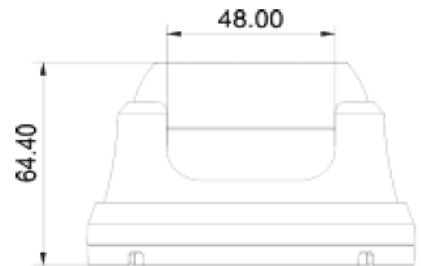

TECHNICAL SPECIFICATIONS

Model	700MDVPIR-AU
Signal System	NTSC/PAL
Image Sensor	1/3' Sony ExvIew HAD CCD II, 960H
Total Pixels	1020 (H)X508(V) 1020 (H)Xh96(V) (PAL)
Effective Pixels	976 (H) X494(V) 976 (H) X582(V) (PAL)
Resolution	700 TV Lines
SNR	> 48 Db (AGC Off)
Min. Illumination	0 Lux/F1.2 LED ON
Video Output	1.0Vp-p/75Ω
Lens	3.6mm
White Balance	Auto
Day & Night	Auto
Backlight	Auto
D-WDR	Air On/Off
DNR	2D
AGC	Auto
Electronic Shutter	1/60 - 1/10000 1/50 - 1/10000
IR Distance	6mts (19.68 feet)
IR LENS	24 pcs
Microphone	Integrated
Construction	Vandal proof metal eye-ball design
Ingress Protection	IP66
Input Voltage	DC12V
Power Consumption	2.4 W (200 mA) Leds on
Operation Temperature	-10°C~ +50°C (14°F~122°F)
Storage Temperature	-20°C ~ +60 °C (-4°F~140°F)
Dimension	71 (φ) *94(D)mm



XTS Corp. Headquarters
8880 N.W 18th Terrace,
Doral, FL 33172
P: 305.863.7779
F: 305.863.7478
TF: 1.855.797.8XTS
www.xtscorp.com